



SLIDING AXLE

Kalyn Siebert Sliding Axle trailers are the right choice for towing

low-clearance construction equipment, containers, agricultural equipment, or just about anything you can imagine. A low 7-degree approach angle and 20K neck-mounted winch make dragging damaged or disabled equipment onto the deck routine. Options, like dock levelers, 10-function remote controls, 20HP power pack, bulkheads and work lights allow these sliders to be as versatile as you need them to be. Both 55 Ton & 40 Ton variants available.

High Performance Product

All Kalyn Siebert trailers are engineered to exceed the toughest standards in the industry, delivering:

- Maximum strength at low tare weights
- Lowest maintenance costs
- Longest service life
- The highest possible return on investment

You can rest assured that our trailers protect your payload and your investment.

That's the Kalyn Siebert Advantage.

High Performance Design

- Capacity 80,000 lbs – 110,000 lbs distributed, 50,000 lbs – 70,000 lbs concentrated in 10'
- Four-beam design with 100K psi yield flanges minimum/80K psi yield webs minimum
- 9" center-to-center cross member spacing
- 20,000 lb planetary winch
- Shot blasted, epoxy primer, polyurethane paint
- Sealed electrical system with rubber mounted LED lights


Available in 48', 50' & 53' lengths

ENGINEERED TO PERFORM. BUILT TO LAST.

1505 West Main Street, Gatesville, TX 76528 | 800.525.9689 | www.kalynsiebert.com



Kalyn Siebert | Sliding Axle

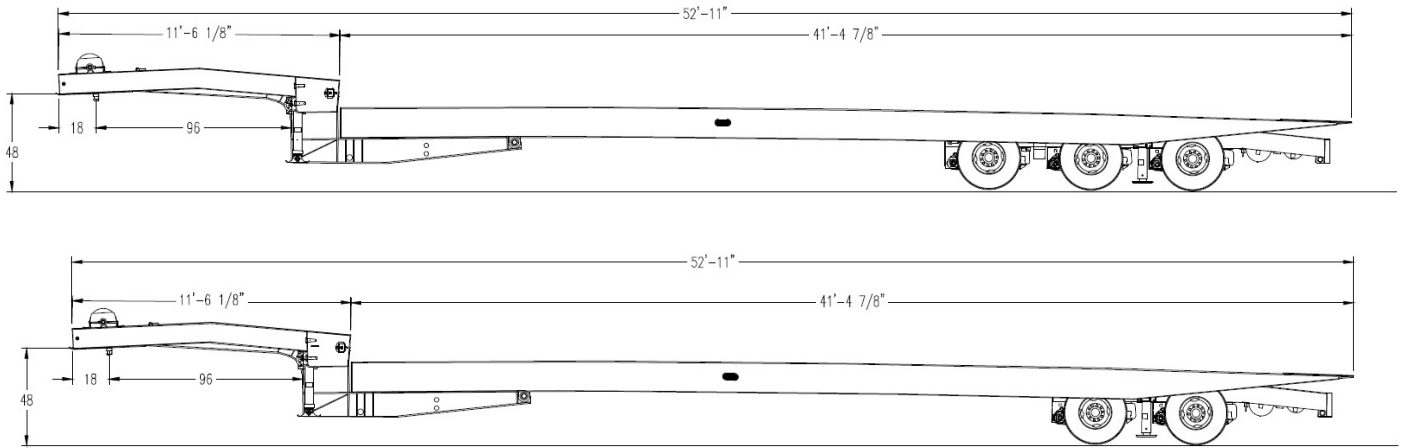

Standard Specs

GOOSENECK

Neck length 11'-6"

Neck height loaded 57½" at front

96" swing clearance

2" pin, 18" setting, 48" fifth wheel height

Set up for wet-line operation, 15 GPM at 2,800 PSI

Controls located in roadside cabinet, storage curbside cabinet

20,000 lb planetary winch at front center, two-function wireless remote, 100' of 5/8" wire rope with shackle, tensioner, roller guide

Two-speed landing legs

MAIN DECK

Deck length 37' 4" – 41' 4"

Deck height loaded 37"

80,000 lbs – 110,000 lbs distributed

50,000 lbs - 70,000 lbs concentrated in 10'

Four-beam design

100K psi yield flanges minimum

80K psi yield web minimum

4" junior I-beams on 9" centers

Tie down slots outer beam (approximately 36" centers)

Tie down slots center plate (approximately 36" centers)

Reinforced approach plate

1½" Apitong floor

Recessed winch roller at front center

Two 6" lift cylinders

Two-stage piggyback slide cylinders

Load angle 7°, dump angle 16°

Self-centering undercarriage

Greased rollers

Air and electrical lines enclosed in flex track for protected travel

SUSPENSION

Air Ride

50" spreads

Automatic air control system

Manual dump valve

AXLES

25,000 lb nominal capacity

Tapered spindles

Hub piloted 8-stud mount

Outboard cast drum

Automatic slack adjusters

12¼" x 7½" (QC)

Parking brakes on all axles

ABS: 2S/1M (2 axle)

ABS: 4S/2M (3 axle)

WHEELS / TIRES

Steel disc wheels, 6.75" x 17.5"

235/75R17.5, 16PR (low profile) radial tires

ELECTRICAL SYSTEM

D.O.T. approved 12 volt, 7-way

LED-sealed beam lights and harness

Marker lights/mid-turn signals

Third tail as strobe light

Options*

20 HP power package

Dual hydraulic system

Multi-function wireless remote

Hydraulic dock levelers

30k Winch

Storage compartments

Bulkhead (alum/steel)

Work lights

Aluminum wheels

Air Weigh Scale

Tire inflation system

Central lube system

Stake pockets/rub-rail

D-rings/ratchet winches

Swing removable outriggers

Steel floor

Synthetic Grease

Skip Plate

Warranty

5-year prorated frame

3-year prorated paint

1-year on remainder of trailer

Call us at 800.525.9689 or visit www.kalynsiebert.com to request a custom quote.

* Additional options available

**KALYN
SIEBERT®**

01/2020