



## SLIDING AXLE

### **Kalyn Siebert Sliding Axle trailers are the right choice for towing**

low-clearance construction equipment, containers, agricultural equipment, or just about anything you can imagine. A low 7-degree approach angle and 20K neck-mounted winch make dragging damaged or disabled equipment onto the deck routine. Options, like dock levelers, 10-function remote controls, 20HP power pack, bulkheads and work lights allow these sliders to be as versatile as you need them to be. Both 55 Ton & 40 Ton variants available.

#### **High Performance Product**

All Kalyn Siebert trailers are engineered to exceed the toughest standards in the industry, delivering:

- Maximum strength at low tare weights
- Lowest maintenance costs
- Longest service life
- The highest possible return on investment

You can rest assured that our trailers protect your payload and your investment.

**That's the Kalyn Siebert Advantage.**

#### **High Performance Design**

- Capacity 80,000 lbs – 110,000 lbs distributed, 50,000 lbs – 70,000 lbs concentrated in 10'
- Four-beam design with 100K psi yield flanges minimum/80K psi yield webs minimum
- 9" center-to-center cross member spacing
- 20,000 lb planetary winch
- Shot blasted, epoxy primer, polyurethane paint
- Sealed electrical system with rubber mounted LED lights


**Available in 48', 50' & 53' lengths**

**ENGINEERED TO PERFORM. BUILT TO LAST.**

1505 West Main Street, Gatesville, TX 76528 | 800.525.9689 | [www.kalynsiebert.com](http://www.kalynsiebert.com)



# Kalyn Siebert | Sliding Axle

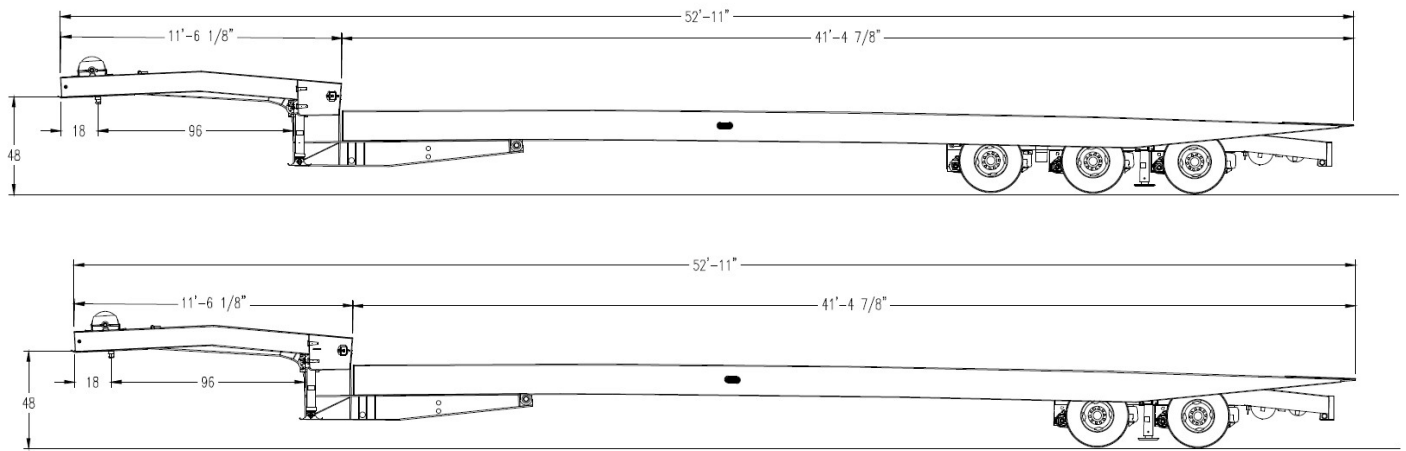

## Standard Specs

### GOOSENECK

Neck length 11'-6"

Neck height loaded 57½" at front

96" swing clearance

2" pin, 18" setting, 48" fifth wheel height

Set up for wet-line operation, 15 GPM at 2,800 PSI

Controls located in roadside cabinet, storage curbside cabinet

20,000 lb planetary winch at front center, two-function wireless remote, 100' of 5/8" wire rope with shackle, tensioner, roller guide

Two-speed landing legs

### MAIN DECK

Deck length 37' 4" – 41' 4"

Deck height loaded 37"

80,000 lbs – 110,000 lbs distributed

50,000 lbs - 70,000 lbs concentrated in 10'

Four-beam design

100K psi yield flanges minimum

80K psi yield web minimum

4" junior I-beams on 9" centers

Tie down slots outer beam (approximately 36" centers)

Tie down slots center plate (approximately 36" centers)

Reinforced approach plate

1½" Apitong floor

Recessed winch roller at front center

Two 6" lift cylinders

Two-stage piggyback slide cylinders

Load angle 7°, dump angle 16°

Self-centering undercarriage

Greased rollers

Air and electrical lines enclosed in flex track for protected travel

### SUSPENSION

Air Ride

50" spreads

Automatic air control system

Manual dump valve

### AXLES

25,000 lb nominal capacity

Tapered spindles

Hub piloted 8-stud mount

Outboard cast drum

Automatic slack adjusters

12¼" x 7½" (QC)

Parking brakes on all axles

ABS: 2S/1M (2 axle)

ABS: 4S/2M (3 axle)

### WHEELS / TIRES

Steel disc wheels, 6.75" x 17.5"

235/75R17.5, 16PR (low profile) radial tires

### ELECTRICAL SYSTEM

D.O.T. approved 12 volt, 7-way

LED-sealed beam lights and harness

Marker lights/mid-turn signals

Third tail as strobe light

## Options\*

20 HP power package

Dual hydraulic system

Multi-function wireless remote

Hydraulic dock levelers

30k Winch

Storage compartments

Bulkhead (alum/steel)

Work lights

Aluminum wheels

Air Weigh Scale

Tire inflation system

Central lube system

Stake pockets/rub-rail

D-rings/ratchet winches

Swing removable outriggers

Steel floor

Synthetic Grease

Skip Plate

## Warranty

5-year prorated frame

3-year prorated paint

1-year on remainder of trailer

Call us at 800.525.9689 or visit [www.kalynsiebert.com](http://www.kalynsiebert.com) to request a custom quote.

\* Additional options available



01/2020