



MINI DECK

The “MiniDECK” Detachable Gooseneck Lowboy is another great example of the innovation Kalyn Siebert is known for in the heavy-haul industry to maximize payloads with optimum versatility. The 3-beam design uses a center box beam allowing for a lighter yet exceptionally strong main deck featuring a loaded deck height of 12-inches and 4-inches of ground clearance.

High Performance Product

All Kalyn Siebert trailers are engineered to exceed the toughest standards in the industry, delivering:

- Maximum strength at low tare weights
- Lowest maintenance costs
- Longest service life
- The highest possible return on investment

You can rest assured our trailers protect your payload and your investment.

That's the Kalyn Siebert Advantage.


High Performance Design

- Ultimate versatility with 12” loaded deck height
- 4” of ground clearance.
- 30 tons concentrated in 16 feet, 35 tons distributed
- 5 position Hydraulic Removable Gooseneck
- Featuring 13 D-rings per side

ENGINEERED TO PERFORM. BUILT TO LAST.

1505 West Main Street, Gatesville, TX 76528 | 800.525.9689 | www.kalynsiebert.com

**KALYN
SIEBERT®**
www.kalynsiebert.com

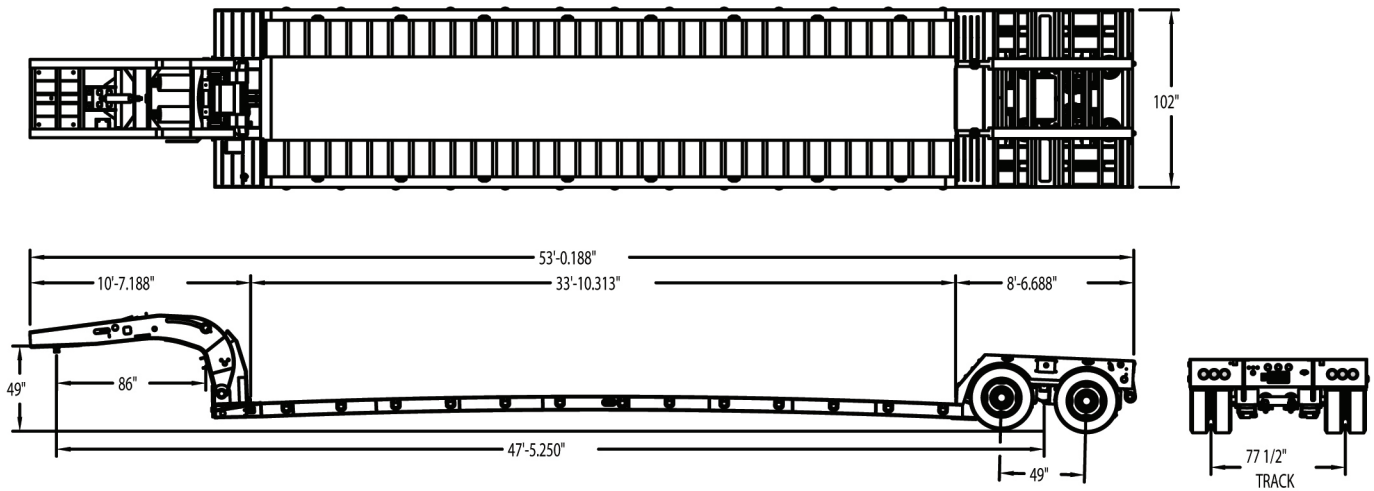

Standard Specs

MAIN DECK

Nominal Deck Length: 33'
 Loaded Deck Height: 12"
 4" Loaded Ground Clearance
 3 Beam design - 100,000 psi yield flanges & 80,000 web minimum
 Fabricated 8" I Main beams
 4" I-Beam Full Width Cross members on 24 in Centers
 4" in I beams Stub in Cross members alternating on 12 in centers
 1.25 in Nominal Apitong Decking - Full Width, Flush to top flanges
 Bent D Rings on Side rail (13 Pairs) & on Rear Deck (2 Pairs)
 Tiedowns on top of Flanges of Side rails
 Front tapered deck - approx. 4 3/8" drop to ground

GOOSENECK

Hydraulic Detachable Gooseneck
 5 Position Adjustable Neck
 49" Loaded 5th Wheel Height
 Narrow Neck
 86" Swing Radius
 15" Setting, 2" King pin
 No front lugs on standard model for future flip neck
 PTO powered: two main & one lift arm cylinders

REAR SECTION

2 Axles / 5" round, 5/8" wall 25000# nominal capacity
 Ridewell Air Ride suspension or equivalent
 49 in axle spacing & 40 in Loaded Rear Section Nominal

Hub: 10 Stud, Hub Piloted, Long studs, Cast Drums

255/70R22.5, 16-PR Radial tires on Steel Wheels

Rear Lugs included for flip axle with air & electrical connections

Wheel well & center section is covered with wood - 1.25 in Apitong

GENERAL

Front (with safety loop) Aluminum ladders
 12 Volt System with 7 way Sealed Harness
 3 Tail light package, Mid turn and clearance
 Epoxy Primer & Black Polyurethane Paint
 4' Tool tray at front of lower deck
 Mid-Turn Signal/Clearance Light
 KS Mud Flaps
 Red & white conspicuity tape

Options*

Full Width Neck - 8' long 8.5' wide
 Tire Inflation System
 Aluminum Wheels

Honda Power Pack 13 HP
 Non Skid Surface (Main Beam)
 AirWeigh Load Digital Scale

Warranty

5-year prorated frame
 3-year prorated paint
 1 year on remainder of trailer

The **MiniDECK** can be customized to meet your specific needs. Call us at 800.525.9689 or visit www.kalynsiebert.com to request a custom quote.

* Additional options available