



VERSA MAXX-EXT™

50T HRG TRANSFORMER

53' TO 58'

Versatility and durability. That's what you can expect from the new VersaMAXX-EXT™ 50T HRG Transformer trailer. This powerhouse is designed specifically for strength, flexibility, performance and transforms from 53' – 58' instantly to meet your coast-to-coast needs. And because this trailer bears the Kalyn Siebert name, you can rest assured your payload and your investment are in good hands.

High Performance Product

All Kalyn Siebert trailers are engineered to exceed the toughest standards in the industry, delivering:

- Maximum strength at low tare weights
- Lowest maintenance costs
- Longest service life
- The highest possible return on investment

You can rest assured our trailers protect your payload and your investment.

That's the Kalyn Siebert Advantage.

High Performance Design


- 100k lbs capacity
- 22" loaded deck height
- 6" ground clearance
- 5-position detachable gooseneck
- 2-20k winches w/wireless remotes
- 53' to 58' Transformer Advantage

ENGINEERED TO PERFORM. BUILT TO LAST.

1505 West Main Street, Gatesville, TX 76528 | 800.525.9689 | www.kalynsiebert.com

**KALYN
SIEBERT®**
www.kalynsiebert.com

Kalyn Siebert | VersaMAXX-EXT™ 53' to 58'

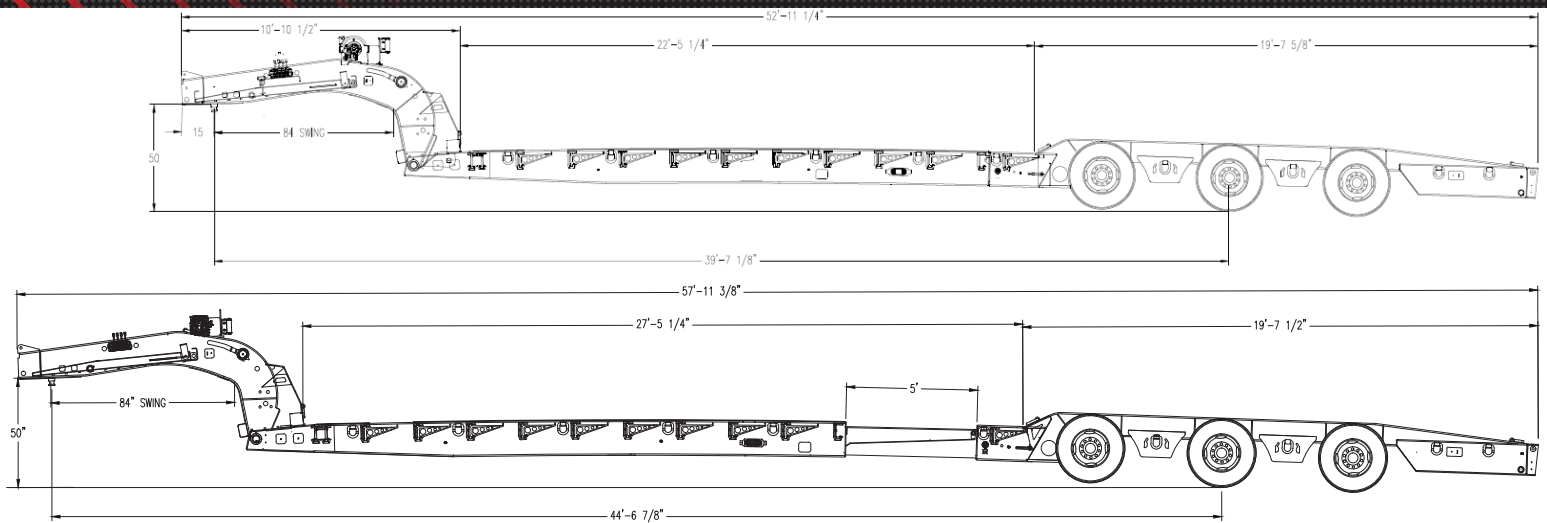

Standard Specs

MAIN DECK

- 22" Loaded Deck Height
- 6" Ground Clearance
- Four-beam Design
- 100,000 PSI Minimum Yield Flange
- 80,000 PSI Minimum Yield Web
- Bent D-rings Per Side (x6)
- Tie-down Slots in Top Flange
- Removable Outriggers Per Side (x10)
- 8" I-beam X-members on 24" Centers
- 4" Jr I-beam Alternating on 12" Centers
- 1 3/8" Apitong Floor (Steel Center)
- Auxiliary Air Connection (front/rear)

GOOSENECK

- Hydraulic Removable Neck
- Set Up For Wet-line Operation
- Non-ground Bearing
- Adjustable 5-position Ride Height
- 84" Swing Clearance
- 50" Kingpin Height / 15" Kingpin Setting
- Lugs for 24" - 28" Flip Neck

REAR BRIDGE

- 19'-7" Rear Bridge
- D-rings at Rear (x17)
- Load-bearing Bolsters
- Air Lift Rear Axle
- Flag Holders (x4)
- Self-retracting Bridge

RAMPS

- Steel Front Flip Ramps for Equipment Loading (Removable)
- 6' Aluminum Ramps for Bus Loading (5-degree Front Load Angle)
- Aluminum Ramp Storage
- Rear Lugs For Aluminum Ramps

WINCHES

- 2-20k Winches (gooseneck & rear)
- Four-function Wireless Remote
- 100' of 5/8" Wire Rope
- Fairing Roller Lead
- Cable Tensioner
- Lighted Control Cabinet
- Hydraulic Control Cabinet

SUSPENSION

- 25,000 lb. Air Ride
- Auto/Manual Air Control System

AXLES

- 25,000 lb. Nominal (x3)
- 60" Spacing
- ABS (2S/1M)/Parking Brake Two Axles
- Tapered Spindles/Automatic Slacks
- Hub-piloted 8-stud Mount
- Outboard Cast Drums
- 12 1/4" X 7 1/2" Brakes (QC)

WHEELS/TIRES

- 6.75 X 17.5 Aluminum Wheels
- 235/75R 17.5 16-ply Tires
- Tire Inflation System

ELECTRICAL SYSTEM

- D.O.T. Approved 12V/7-way
- LED-sealed Beam Lights and Harness
- Marker Lights/Mid-turn Signals
- Third Tail as Strobe Light
- LED Work Lights
- Battery Back-Up with 12V Charger

Options*

- 13 HP Power Package
- Dual Hydraulic System
- 24" - 28" Flip Neck
- Air Weigh Scale
- Disc Brakes
- 30k Winch — 100' of 5/8" Wire Rope
- Steel Wheels
- Spare Tire Carrier
- Air Lift Axle (front/rear)
- Rumber Strip Package

- Outrigger Plank Set
- Accent Paint Package
- 53'-58' Overall Length Available

Warranty

- 5-year prorated frame
- 3-year prorated paint
- 1-year on remainder of trailer

Call us at 800.525.9689 or visit www.kalynsiebert.com to request a custom quote.

* Additional options available

